



Weighing Instrumentations


weight transmitters



UWT 600

- DIN Rail Mounting
- Output RS232 or RS422/RS485, ASCII Protocols or MODBUS RTU
- High performance and reliability

- Optional Protocols: PROFIBUS, DeviceNet, Ethernet
- Analog Output (option)
- Possibility to configure the tool with several options simultaneously

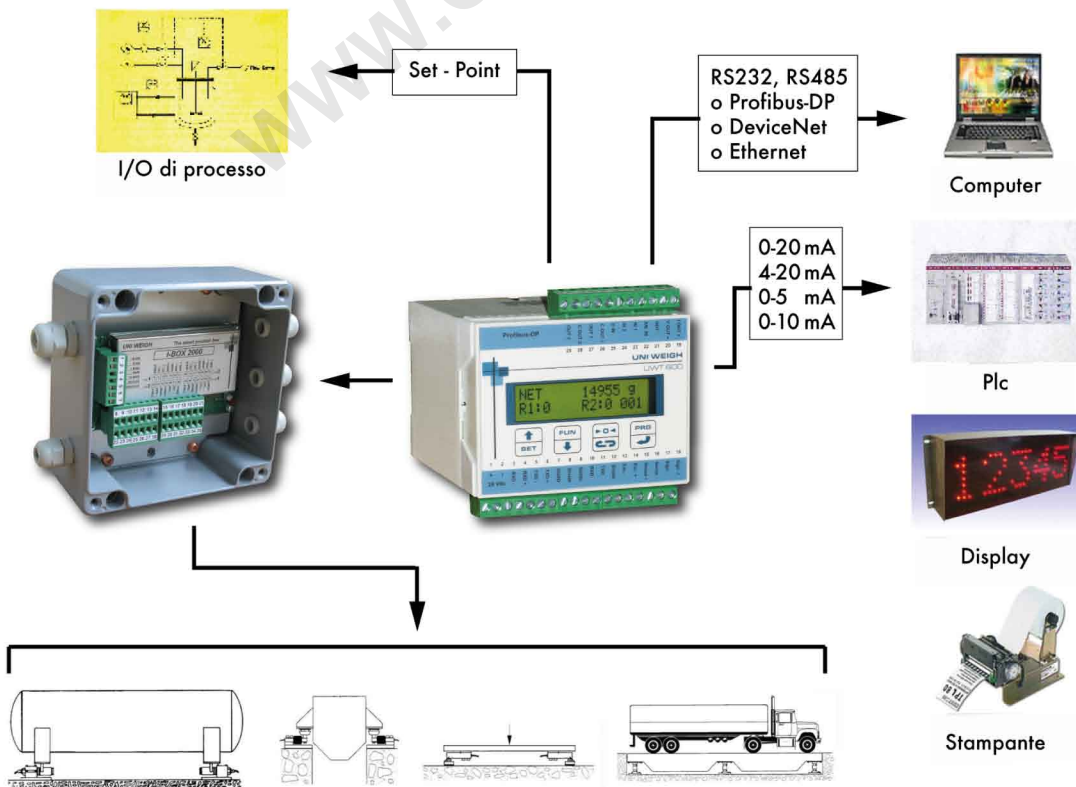

TECHNICAL CHARACTERISTICS UWT 600

Trasduttore input voltage:	5 V (max 6 load cells 350 Ohm)
Measuring range:	-1.5 ÷ +3.5 mV/V
Input sensitivity:	0.02 µV/ per count