


COMPRESSION LOADCELL

Model CM86

Compression Load Cell.
Small and lightweight.

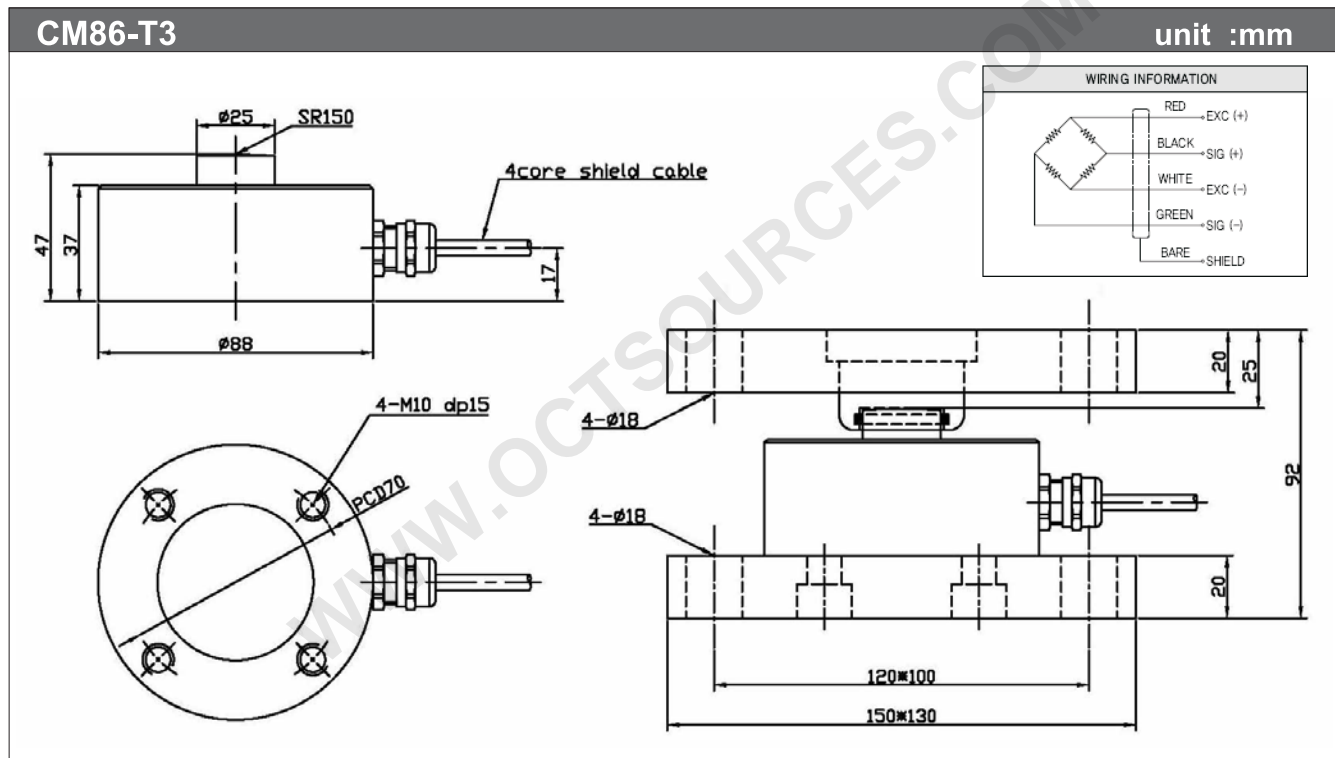

SPECIFICATIONS

Specification	Accuracy
Model	CL86
Rated Capacity(R.O.)	3tf
Rated Output(R.O.)	2mV/V
Non-linearity	0.2% R.O.
Hysteresis	0.2%R.O.
Repeatability	0.1% R.O.
Zero Balance	± 1 % R.O.
Temp.Range Compensated	-10°C ~60°C
Temp. Effect On Rated Output	± 0.1%load / 10 °C
Temp.effect On Zero Balance.	± 0.1% R.O./10 °C
Resistance, Input	350 ohm±30
Resistance, Output	350 ohm±2
Insulation Resistance Bridge To Ground	2000Mohm
Electrical Connection	∅5mm x 4C x 3m
Exc.recommended	10V
Safe Overload	120% R.C