


型号 CC37-10T 系列

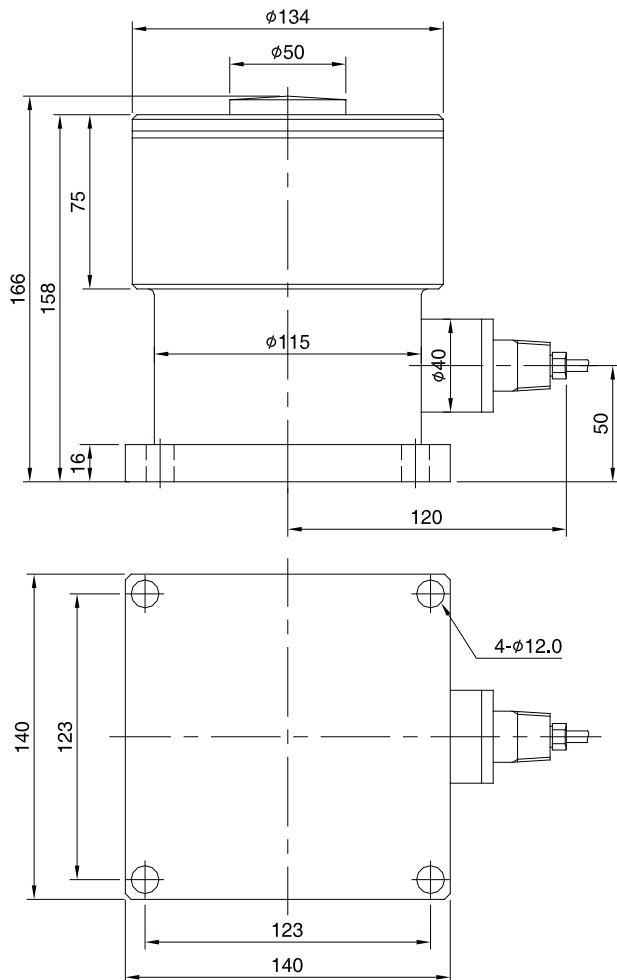

规格

| | |
|-------------|---------------------------------|
| 型号 | CC37 |
| 额定量程(R. C.) | 10ton |
| 灵敏度(R. O.) | 1.5mV/V ± 1% |
| 非线性 | ≤0.1% R.O. |
| 滞后 | ≤0.1% R.O. |
| 重复性误差 | ≤0.1% R.O. |
| 蠕变误差 | ≤0.1% (20min) |
| 零点平衡 | ≤1% R.O. |
| 温度补偿范围 | -10 ~ 70°C |
| 工作温度范围 | -20 ~ 80°C |
| 温度对额定输出的影响 | ≤0.1% LOAD/10°C |
| 温度对零点平衡的影响 | ≤0.1% R.O./10°C |
| 输入阻抗 | 700 Ohms ±3.5 Ohms |
| 输出阻抗 | 700 Ohms ±5 Ohms |
| 绝缘电阻 (最小) | 2000 MOhms(50V DC) |
| 激励电压 | 3~10V(推荐), 15V(最大) |
| 电缆长度 | ∅7mmx6m(22AWG x 4Core Shielded) |
| 防护等级 | 符合IP 67 |
| 安全过载 | 150% R.C |
| 极限过载 | 300% R.C |
| 边缘荷载 | 10% R.C |

订购须知

CC37 - **10T**
 型号 CC37 量程 10ton

接线须知

