

Product Information

Materials testing machine with ball lead screw drive Z2000E



Figure: Zwick Z2000E with hydraulic grips

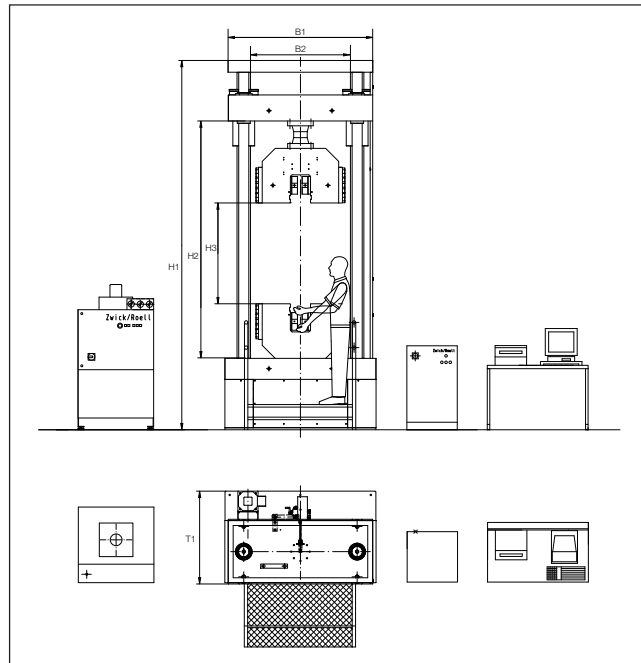


Figure: Drawing of Zwick Z2000E with hydraulic grips

Key benefits

- These electro-mechanical materials testing machines are fitted with a ball lead screw drive.
- Wide measuring range allows precise determination of even small test loads without re-tooling.
- Long travel combined with comparatively low build-height provides trouble-free specimen clamping and user-friendly testing over a wide range of specimen lengths.
- Low-maintenance, pre-stressed ball lead screws ensure accurate, long-term tensile and compression testing.

Further advantages and features

- The load frame is robust and extremely stiff.
- Standard tests using Zwick *testXpert*[®] software require only single-button operation.
- Modular design throughout the system allows the entire Zwick accessory range to be used, including a wide variety of extensometers, specimen grips and other test tools.
- Should new test requirements arise, additional test tools (e.g. calibration blocks) are easily installed via a T-slot or screw system.
- Can be tailored to customers' specific requirements (e.g. test area dimensions, test devices, specimen grips, test speed ranges, testing software).

Product Information

Materials testing machine with ball lead screw drive Z2000E

Model	Z2000E
Fmax [kN]	2000
[lb]	450000
Number of lead columns	4
Number of drive columns (ball lead screws)	2
Stiffness of load frame	
crosshead deflection and elongation of lead screw drive approx. [kN/mm]	1510
including load cell, hydraulic grips and drive approx. [kN/mm]	
Dimensions of load frame	
H1 – Height [mm]	4420
B1 – Width [mm]	1800
T1 – Depth [mm]	1090
Dimensions of test area	
H2 – Height [mm]	2826
B2 – Width [mm]	1090
Test stroke max.	
without tools / specimen grips [mm]	2500
H3 – with hydraulic grips (including load cell) [mm]	1200
Test speed [mm/min]	0.001 – 300
Weight	
without tools / specimen grips (with electronics) [kg]	9800
with specimen grips [kg]	13500
Specific floor loading [kg/cm ²]	2.25
Resolution of crosshead travel [µm/Impuls]	0.0032
Position accuracy [µm]	1.0
Item no.	• 030265
	(BPC-F2000EN.R16)

Environmental conditions	
Operating temperature [°C]	+10 ... +35
Storage temperature [°C]	-25 ... +55
Humidity range (not condensing) [%]	< 90
Electrical connection	
Mains voltage 3 Ph/N/PE ^{1 2} [V]	400
Mains frequency [Hz]	50 / 60
Drive power	
without specimen grips [kVA]	20
with hydraulic grips [kVA]	28.5
Fuse [A]	50
Noise level at 1m distance [dB(A)]	< 70
Color coating of rack	RAL7011 (iron gray), RAL7038 (agate gray)

¹ Three phase AC motor (L1, L2, L3), neutral wire N, protective earth PE

² < ± 10 % related to the mains voltage