

PRODUCT DATA

Piezoelectric Accelerometers Miniature Triaxial DeltaTron® Accelerometers — Types 4520, 4520-001 and 4520-004

USES AND FEATURES

- General purpose
- Structural analysis
- Modal measurements
- Triaxial
- Lightweight
- Hermetically sealed

Description

Types 4520, 4520-001 and 4520-004 are small, lightweight, triaxial, piezoelectric accelerometers, with sensitivities of 10 or 1 mV/g. All types feature a hermetic 4-pin receptacle 1/4"-28 UNF-2A with three independent outputs for simultaneous measurements on the x-, y- and z-axes. Their light weight makes them ideal for measurements on light structures.


Mounting

Careful mounting is required to ensure correct operation over the full frequency range of the accelerometers.

Versions

Type 4520 weighs <3 grams and is mounted adhesively.

Types 4520-001 and 4520-004 weigh 4 grams and can be mounted either adhesively or by using a stud and the M3 tapped hole.

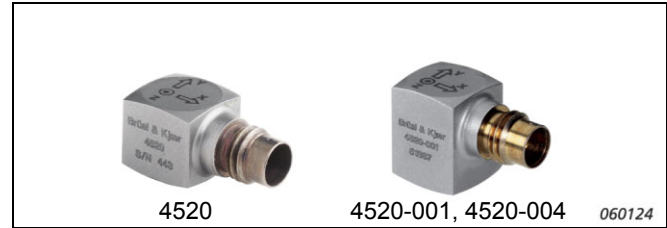

Characteristics



The accelerometer design features a built-in preamplifier. The accelerometer's sensitivity is expressed in terms of voltage per unit acceleration, mV/ms^{-2} (mV/g).

The accelerometers are Shear designs where the piezoelectric elements undergo shear deformation. This design exhibits good characteristics regarding base strain and temperature variations. The housing is titanium, the unit is hermetically sealed, and the sensing element is quartz.

Calibration

Each accelerometer is individually calibrated using state-of-the-art, random FFT technology to provide a comprehensive, 1600-point, high-resolution calibration chart (magnitude and phase), which ultimately gives a unique characterisation and secures the integrity of the vibration measurement.

The sensitivity given in the calibration chart has been measured at 159.2 Hz with a 95% confidence level, using a coverage factor $k = 2$.

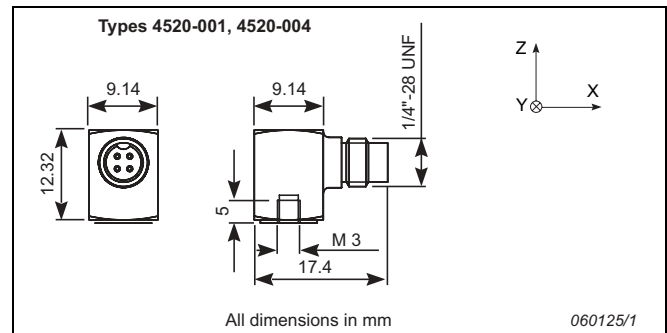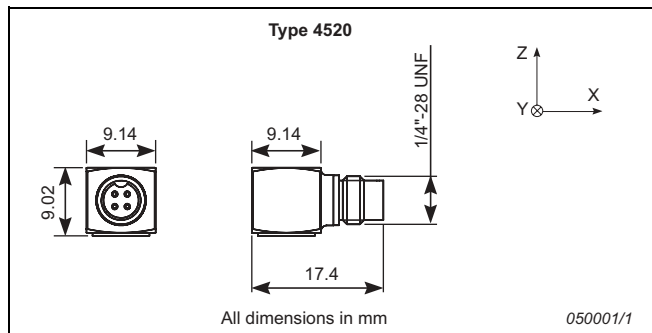



Specifications – Miniature Triaxial DeltaTron Accelerometers Types 4520, 4520-001 and 4520-004

	Units	4520 ^a	4520-001 ^b	4520-004 ^c
Dynamic Characteristics				
Voltage Sensitivity (@ 159.2 Hz)	mV/ms ⁻² (mV/g)	1 + 12/-8% (10 ± 10%)		0.1 + 12/-8% (1 ± 10%)
Measuring Range	ms ⁻² (g)	± 5000 (± 500)		± 50000 (± 5000)
Mounted Resonance Frequency	kHz	x, y: 30 z: 40	x: 20 y: 25 z: 30	
Amplitude Response ±10% [1]	Hz	x, y, z: 2 to 7000	x, y: 2 to 4000 z: 2 to 7000	
Residual Noise (2 Hz to 7 kHz)	mg	x, y, z: 7		x, y, z: 56
Transverse Sensitivity	%	<5		
Electrical Characteristics				
DC Output	At room temperature	V DC	8.5 to 11.5	
Bias Voltage	In specified temp. range	V DC	8 to 16	
Output Impedance	Ω	<100		
Grounding		Signal ground connected to case		
Power Requirements				
Supply Voltage	V DC	18 to 30		
Supply Current	mA	2 to 20		
Warm-up Time	s	1		
Environmental Characteristics				
Temperature Range	°C (°F)	-51 to +121 (-60 to +250)		
Humidity		Hermetically sealed		
Operational Sinusoidal Vibration Limit (peak)	ms ⁻² (g)	5000 (500)		50000 (5000)
Shock Limit (peak)	ms ⁻² (g)	50000 (5000)		
Base Strain Sensitivity	Equiv. g/μstrain	0.03	0.015	
Magnetic Sensitivity	g/T	1.2		4
Temperature Response	%/°C (%/°F)	-0.06 (-0.033)		
Thermal Transient Sensitivity	g/°C (g/°F)	0.36 (0.2)		
Physical Characteristics				
Dimensions		See outline drawing		
Weight	gram (oz.)	2.9 (0.10)	4 (0.14)	
Case Material		Titanium		
Connector		Hermetic 4-pin receptacle ¼"-28 UNF-2A		
Mounting		Adhesive	M3 tapped hole or adhesive	

[1] All values typical at 25°C (77°F) unless measurement uncertainty is specified

COMPLIANCE WITH STANDARDS

 Compliance with EMC Directive and Low Voltage Directive of the EU

 Compliance with the EMC requirements of Australia and New Zealand

Note: The unit may be sensitive to conducted RF^c and surge transients^{a, b, c}

Ordering Information

Type 4520 includes the following accessories:

- Carrying Box
- Calibration Chart

Types 4520-001 and 4520-004 include the following accessories:

- Carrying Box
- Calibration Chart
- M3 to M3 Mounting Stud with Flange

OPTIONAL ACCESSORIES

- AO-0526-D-050 Cable with 4-pin to 3 × BNC Connectors, 5 m (16 ft) 85°C (185°F)
- AO-0527-D-050 Cable with 4-pin to 3 × 10–32 UNF Connectors, 5 m (16 ft) 85°C (185°F)
- AO-0528-D-050 Cable with 4-pin to 4-pin Connectors, 5 m (16 ft) 85°C (185°F)
- AO-0534-D-050 Cable with 4-pin to 3 × BNC Connectors, 5 m (16 ft) 120°C (248°F)
- DB-1425 Adaptor M3 to 10–32 UNF
- QS-0007 Tube of Cyanoacrylate Adhesive
- UA-1075 Mounting Magnet with M3 Stud
- UA-1193 Set of 10 M3 to M3 Insulating Studs
- UA-1221 Set of 25 M3 to M3 Studs with Flange
- UA-2065 Set of 10 M3 Steel Studs
- WA-0224 Mechanical Filter
- WB-1453 DeltaTron Power Supply

SERVICE

- 4520-CAF Miniature Cubic Triaxial IEPE Accelerometer, Accredited Calibration
- 4520-CAI Miniature Cubic Triaxial IEPE Accelerometer, Accredited Calibration Performed as Initial
- 4520-CTF Miniature Cubic Triaxial IEPE Accelerometer, Traceable Calibration
- 4520-CTI Miniature Cubic Triaxial IEPE Accelerometer, Traceable Calibration Performed as Initial
- 4520-EW1 Miniature Cubic Triaxial IEPE Accelerometer, Extended Warranty, one year extension

Brüel & Kjær reserves the right to change specifications and accessories without notice

Brüel & Kjær 

深圳市现代豪方仪器仪表科技有限公司 0755-26738591 1339286394

Local representatives and service organisations worldwide

